


ASMG025D113S11

I-PEX MHF1 TO RP-SMA FEMALE BULKHEAD 250MM 1.13 CABLE

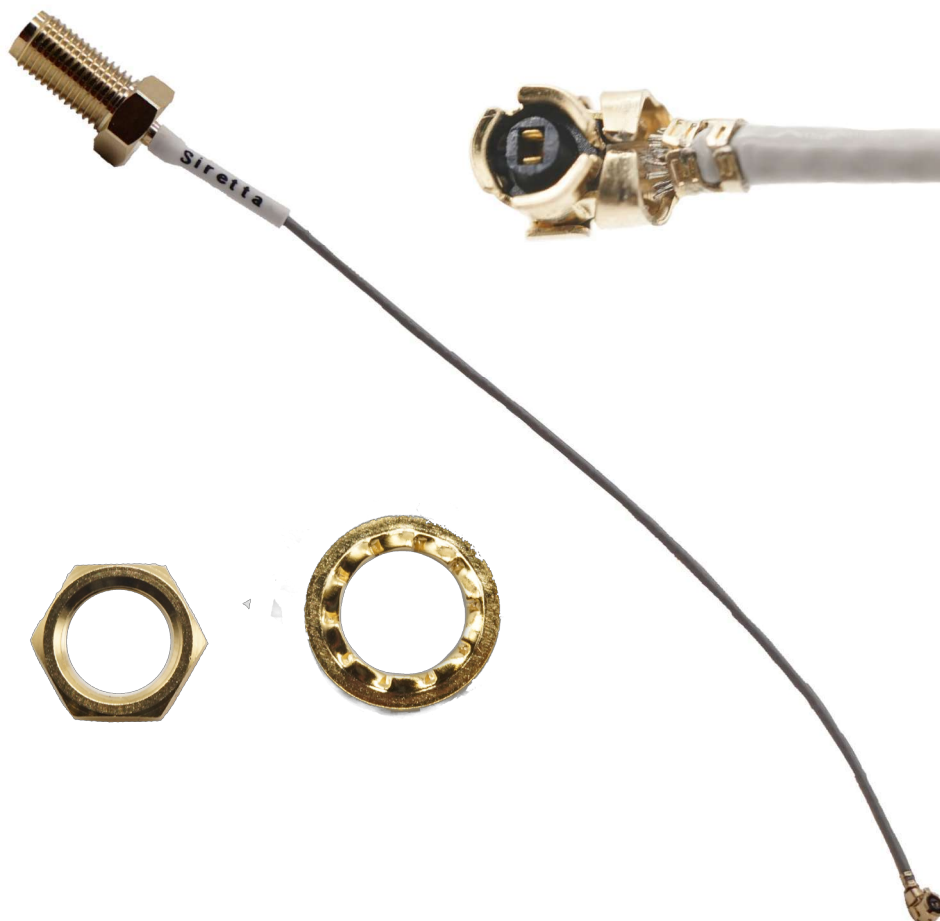

Key Features

- Low Loss coaxial cable
- OD 1.13mm
- Color Grey
- RoHS and REACH compliant
- Crimp strength 20N minimum

Electrical Specifications

Suggested Working Frequency:	0 to 6 GHz
Nominal Impedance:	50 +/- 3 Ω
Maximum Operating Voltage:	30 V
Return Loss:	-15 dB (Max. between 0 and 6 GHz)


Environmental Specifications

Operating Temperature:	-20 to +60 °C
Storage Temperature:	-20 to +60 °C
RoHS Compliant:	YES
REACH Compliant:	YES

ASMG025D113S11

I-PEX MHF1 TO RP-SMA FEMALE BULKHEAD 250MM 1.13 CABLE

Mechanical Drawing

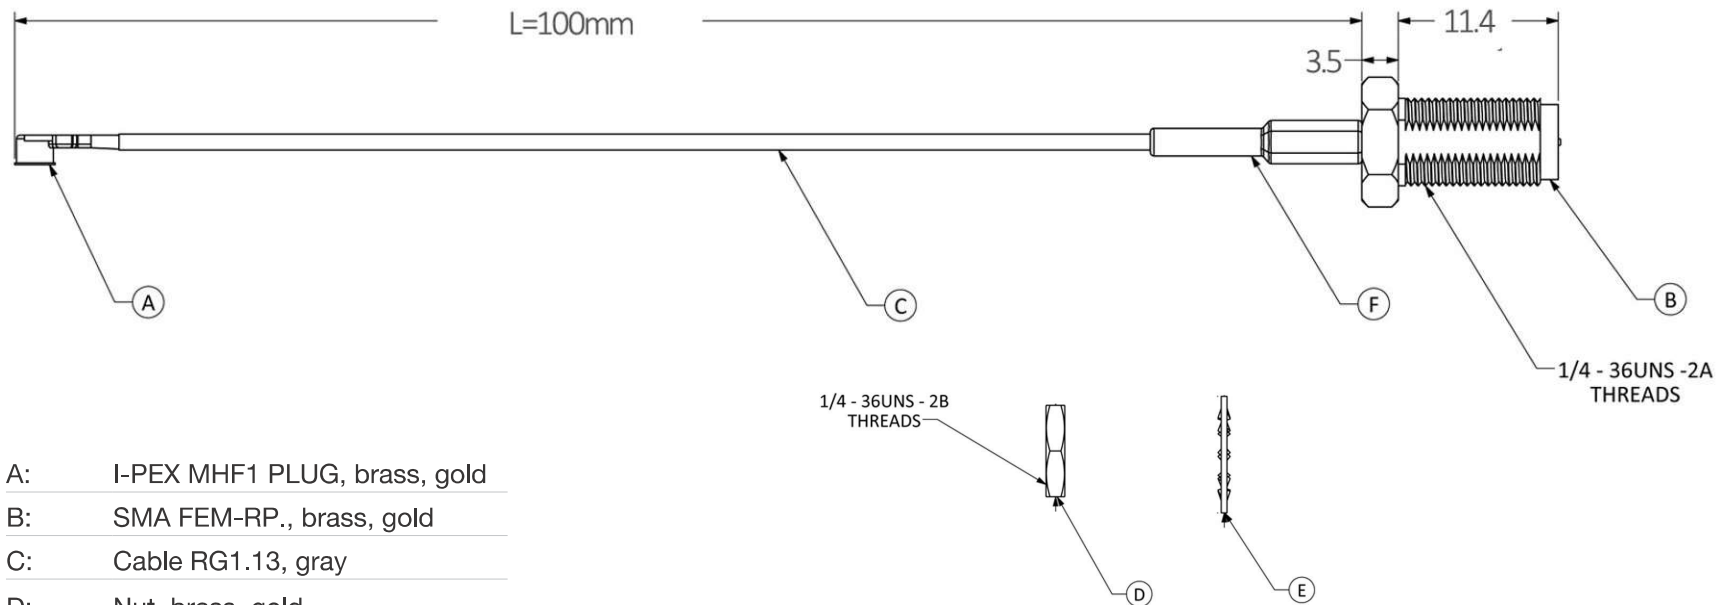


A:	I-PEX MHF1 PLUG, brass, gold
B:	SMA FEM-RP., brass, gold
C:	Cable RG1.13, gray
D:	Nut, brass, gold
E:	Washer, brass, gold
F:	Heat shrink tube, white

Ordering Details:

Part Number	Description
ASMG025D113S11	I-PEX TO RP-SMA FEMALE BULKHEAD 250MM 1.13 CABLE

GENERAL TOLERANCES	
. x	± 0.2
. xx	± 0.2
. xxx	± 0.2
ANGLES	$\pm 3^\circ$
(UNLESS OTHERWISE SPECIFIED)	

SCALE	2:1
SIZE	A4
	
SHEET 1 of 1	

PART NUMBER:
ASMG025D113S11