



REV	DESCRIPTION	DRAWN	DATE

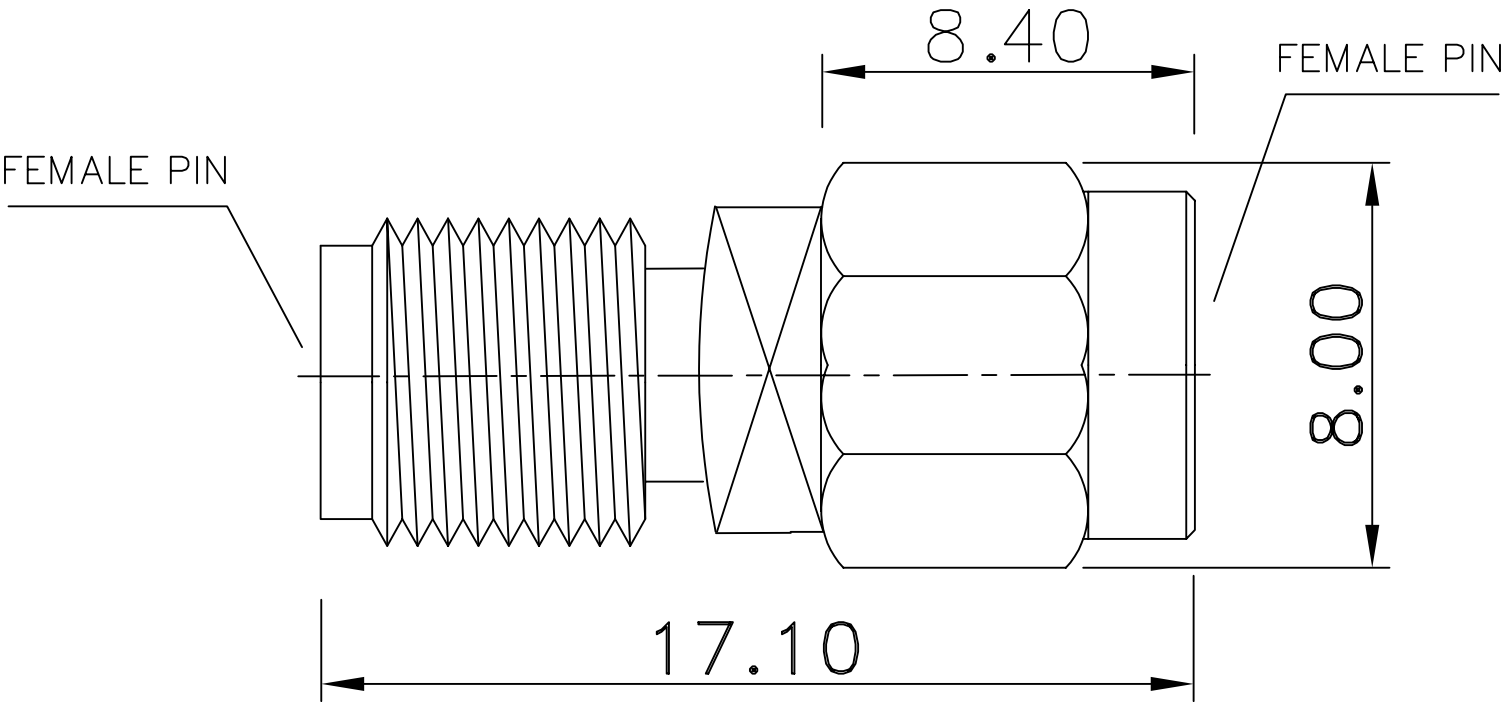

5	Gasket	1	Si-rubber	None							
4	Shell(S-004)	2	Brass	NICKEL	UNLESS OTHERWISE SPECIFIED 1.REMOVE ALL BURRS. 2.BREAK ALL CONNERS & EDGES CO.15 MAX. 3.CHAMFER 1ST & LAST THREADS 45°. 4.DIAMETERS ON COMMON CENTERS. TO BE CONCENTRIC WITHIN 0.1 T.I.R. 5.ALL DIMENSIONS ARE AFTER PLATING.	* MAJOR DIMENSION  UNLESS OTHERWISE NOTED TOLERANCES 0.5-6=±0.2 6-30=±0.4 30-120=±0.6 120-315=±1.0 ANGLES=±1°		APPROVED	<div>  <b>Siretta</b>            Enabling Industrial IoT         </div>		
3	Dielectric(T-00030)	2	Teflon	None				CHECKED			
2	Pin(C-00040)	1	Be Cu	Gold				DRAWN			
1	Body(B-00037)	1	Brass	NICKEL				andrew	TITLE SMA FEMALE TO SMA MALE REVERSE POLARITY		
NO	Description	Q'ty	Material	Finish			SCALE	3/1	UNIT	MM	DRAWN DATE 03/12/02 FILE NO.